


- ❑ All-in-One | Out of the Box Ready to Use
- ❑ Industry's Only Battery Powered LED
- ❑ New Easy-Learn® Programming



Features

- ❑ SunBright Technology for Outdoor Applications
- ❑ Applications No Assembly Required
- ❑ Momentary Push Button ON/OFF
- ❑ Quick Disconnect Wire Terminals
- ❑ 2 Wire Cord Grips Included | No Add Ons
- ❑ 1,2,4,6,8 Display Options
- ❑ 14.4VDC Output to Power Sensor

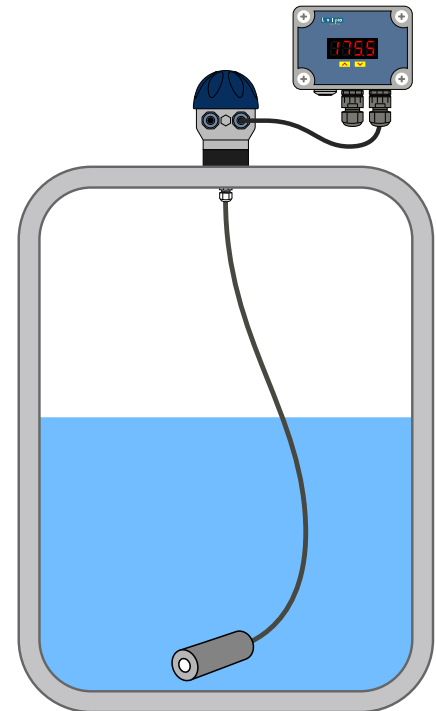

Specifications

General

Display	LED 50 x 20mm High Red
Displayed Values	-999 ± 9999
Stability	50 ppm °C
Power Supply	4000mAh Battery Powered >30 Days of on time 8000mAh*
Protection Class	NEMA 4X IP67

Input Signal | Supply

Standard	Current: 4-20mA
Voltage	9-36VDC

Output Signal | Supply

Standard	4-20mA Loop
Voltage	14.4VDC
Passive current output *	4-20mA (Operating Range Max. 2.8 - 24mA)

Performance

Accuracy	0.1% @ 25°C One Digit
*Accuracy According to IEC 60770 - Limit Point Adjustment Non-Linearity Hysteresis Repeatability	

Temperatures

Operating Temperatures	-4 - 158°F -20 - 70°C
------------------------	-------------------------

Materials | Wetted

Housing	Polycarbonate
---------	---------------

*optional

Model Selection

Part Number	Input	Output
ITC-250B	4-20mA	
ITC-250BT	4-20mA	4-20mA to Sentinel

*Contact Factory for different options